


Brute[®] Series 350, 450, 650 Label Applicators

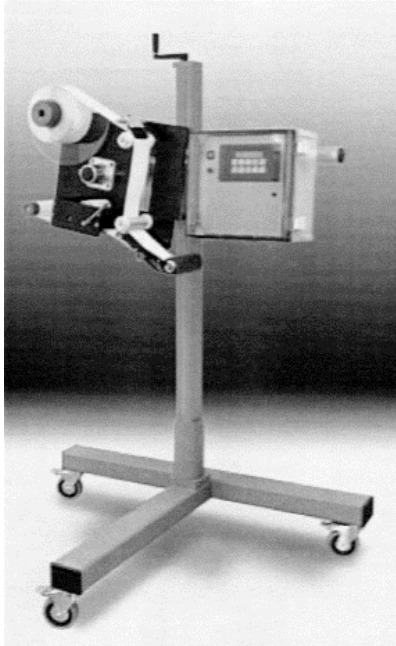

Specificatio

Construction:

Aluminum and stainless steel with steel fasteners, modular design for easy service.

Application Method:

Label is separated from backing and applied to moving product. Applicator can be mounted at any position desired.

Maximum Application Rate:

100 labels per minute.
Dependent on label length.

Label Specifications:

Width 1/2" to 3 1/2", 4 1/2", and 6 1/2" standard.
Length variable.

Roll Size:

12" Max OD supply roll on 3" core.

Label Placement Accuracy:

Dependent on product irregularities,
registration $\pm 1/16"$

Product Detection:

Various sensors available.

Control Center:

All controls and solid-state circuitry are contained in a moisture and dust-resistant enclosure.

Control center can be mounted in a location convenient for operator.